


01-18-00

A

01/14/00



jc583 U.S. PTO

Please type a plus sign (+) inside this box → ☐Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	TELNP200US
First Inventor or Application Identifier	Michael L. Trompower
Title	IMPROVED 802.11 NETWORKS USING DYNAMIC...
Express Mail Label No.	EK243449429US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages **24**]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **10**]
4. Oath or Declaration [Total Pages **2**]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
13. ☐ * Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☒ Other: Express Mail Certificate
37 CFR 1.10

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____ / _____
Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label _____ or ☒ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name	Amin & Eschweiler, L.L.P.		
	Himanshu S. Amin		
Address	24th Floor, National City Center		
	1900 East 9th Street		
City	Cleveland	State	OH
		Zip Code	44114
Country		Telephone	216-696-8730
		Fax	216-696-8731

Name (Print/Type)	Himanshu S. Amin	Registration No. (Attorney/Agent)	40,894
Signature		Date	1/14/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

Atty. Docket No. TELNP200US

**IMPROVED 802.11 NETWORKS USING DYNAMIC
POWER CONTROL FOR RF TRANSMISSION**

by

Michael L. Trompower


CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that the attached patent application (along with any other paper referred to as being attached or enclosed) is being deposited with the United States Postal Service on this date **January 14, 2000**, in an envelope as "Express Mail Post Office to Addressee"

Mailing Label Number **EK243449429US** addressed to the: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

Himanshu S. Amin

(Typed or Printed Name of Person Mailing Paper)



(Signature of Person Mailing Paper)

**TITLE: IMPROVED 802.11 NETWORKS USING DYNAMIC POWER
CONTROL FOR RF TRANSMISSION**

Technical Field

5 The present invention generally relates to communication systems, and in particular to a system and method for increasing throughput of a communication system.

Background of the Invention

10 The use of cellular communication systems having mobile devices which communicate with a hardwired network, such as a local area network (LAN) or a wide area network (WAN), has become widespread. Retail stores and warehouse, for example, may use cellular communications systems with mobile data terminals to track inventory and replenish stock. The transportation industry may use such systems at large outdoor storage facilities to keep an accurate account of incoming and outgoing shipments. In
15 manufacturing facilities, such systems are useful for tracking parts, completed products and defects. Such systems are also utilized for cellular telephone communications to allow users with wireless telephones to roam across large geographical regions while retaining telephonic access. Paging networks also may utilize cellular communications systems which enable a user carrying a pocket sized pager to be paged anywhere within a
20 geographic region.

A typical cellular communications system includes a number of fixed access points (also known as base stations) interconnected by a cable medium often referred to as a system backbone. Also included in many cellular communications systems are intermediate access points which are not directly connected to the system backbone but
25 otherwise perform many of the same functions as the fixed access points. Intermediate access points, often referred to as wireless access points or base stations, increase the area within which access points connected to the system backbone can communicate with mobile devices.

30 Associated with each access point is a geographic cell. The cell is a geographic area in which an access point has sufficient signal strength to transmit data and receive

data from a mobile device such as a data terminal or telephone with an acceptable error rate. Typically, access points will be positioned along the backbones such that the combined cell area coverage from each access point provides full coverage of a building or site.

5 Mobile devices such as telephones, pagers, personal digital assistants (PDA's), data terminals etc. are designed to be carried throughout the system from cell to cell. Each mobile device is capable of communicating with the system backbone *via* wireless communication between the mobile device and an access point to which the mobile device is registered. As the mobile device roams from one cell to another, the mobile
10 device will typically deregister with the access point of the previous cell and register with the access point associated with the new cell. In order to provide sufficient cell area coverage, access points (or the antennas associated with each access point) within the cellular communications system typically are distributed at separate physical locations throughout an entire building or set of buildings.

15 Recently a standard for wireless local area networks (WLANs) known as the IEEE 802.11 standard has been adopted and has gained acceptance among the industrial, scientific and medical communities. The IEEE 802.11 standard for WLANs is a standard for systems that operate in the 2,400-2,483.5 MHz industrial, scientific and medical (ISM) band. The ISM band is available worldwide and allows unlicensed operation of
20 spread spectrum systems. The IEEE 802.11 RF transmissions use multiple signaling schemes (modulations) at different data rates to deliver a single data packet between wireless systems. Current wireless implementations employ a single power level for transmission of an entire packet. As a result, different portions of the packet are capable of reception at different ranges. Therefore, default operation results in a longer preamble
25 range as compared to the other portions of the frame. Once a preamble is correctly received by other access stations, they often need to remain off during an entire frame or frame exchange. This causes stations that are outside an intended transmission range to remain idle during the frame transmission thereby reducing the entire throughput of the system.

An attempt has been made to solve this problem by providing multiple access stations at a single location operating on different frequencies. However, this requires that each station in a single location be different with respect to hardware and software required to operate the station. This has proven to be complicated and expensive in actual implementation. In addition, there is typically only three non-overlapping channels available in such types of systems. Therefore, this solution does not overcome the problem with idle access stations when all three channels are operating. Furthermore, these transmissions along the three channels still do not guarantee access points will not receive interference.

Accordingly, there is a strong need in the art for a system and method that overcomes the aforementioned problems.

Summary of the Invention

The present invention provides for a system and method for adjusting transmission power level of different portions of a data packet. The system and method is especially useful when utilizing the IEEE 802.11 standard protocol due to the varying transmission data rates of a packet. An IEEE 802.11 packet includes a preamble portion, a header portion and a data portion. The preamble portion typically has a data rate of 1 Mbps (Megabits per second), the header has a data rate of 1 or 2 Mbps and the data portion has a data rate of 1, 2, 5.5 or 11 Mbps. At a given fixed power level, a transmission at a higher data rate has a lower transmission range than a transmission at a lower data rate. Therefore, the present invention provides for a system and method that adjusts the power level of different portions of a data packet, so that the entire data packet has a more uniform range. This eliminates the need for components in the system receiving a preamble portion of a transmission at the higher ranges to remain idle during transmission of an entire frame as is the standard in the IEEE 802.11. Furthermore, the present invention allows for dynamic adjustment of the power transmission level, so that range reductions can be implemented to mitigate interference problems and reduce battery

consumption. The system and method can be applied to both access points and mobile units in a cellular communications system.

In accordance with one aspect of the invention, a communication unit in a cellular communication system is provided. The unit includes a transmitter adapted to transmit data over an RF link and a power control module coupled to the transmitter. The power control module is adapted to receive a data packet having a first portion and a second
5 portion and transmit the first portion at a first transmission power level and the second portion at a second transmission power level.

Another aspect of the invention relates to a method of transmitting a data packet in a cellular communication system. The method includes the steps of transmitting a first portion of the data packet at a first transmission power level and transmitting a second
10 portion of the data packet at a second transmission power level.

Another aspect of the present invention relates to an access point system in a cellular communication system utilizing an IEEE 802.11 standard protocol. The system includes a transmitter adapted to transmit data over an RF link and a power control module coupled to the transmitter. The power control module is adapted to receive a data
15 packet having a PLCP preamble and PLCP header portion and a data portion. The power control module is also adapted to dynamically adjust the transmission power of the packet during transmission of the packet, such that the PLCP preamble portion begins transmitting at a first transmission power level and the data portion begins transmitting at a second transmission power level. The system further includes a processor coupled to
20 the power adjustment module. The processor is adapted to provide power adjustment information to the power control module. Finally, the system includes a receiver coupled to the processor. The receiver is adapted to receive data over an RF link. Furthermore, the access point system is coupled to a network.

Yet another aspect of the present invention relates to a cellular communication
25 system. The system includes means for transmitting a data packet having a first portion and a second portion and means for dynamically adjusting the transmission power level,

of the first portion with respect to the second portion of the data packet coupled to the means for transmitting a data packet having a first portion and a second portion.

In yet another aspect of the present invention a signal transmitted over a wireless communication system is provided. The signal includes a first portion transmitted at a first power level and a second portion transmitted at a second power level.

To the accomplishment of the foregoing and related ends, the invention, then, comprises the features hereinafter fully described and particularly pointed out in the claims. The following description and the annexed drawings set forth in detail certain illustrative embodiments of the invention. These embodiments are indicative, however, of but a few of the various ways in which the principles of the invention may be employed. Other advantages and novel features of the invention will become apparent from the following detailed description of the invention when considered in conjunction with the drawings.

Brief Description of the Drawings

Fig. 1 illustrates a system diagram of a network communication system in accordance with the present invention;

Fig. 2 illustrates a protocol of a IEEE 802.11 standard data packet in accordance with the present invention;

Fig. 3 illustrates a graph of a range of a transmission for different portions of the data packet of Fig. 2 at a given power level in accordance with the present invention;

Fig. 4a illustrates a graph of a power of a transmission for different portions of the data packet of Fig. 2 at a reduced power level for the PLCP preamble in accordance with the present invention;

Fig. 4b illustrates a graph of a range of a transmission with respect to the power graph of Fig. 4a in accordance with the present invention;

Fig. 4c illustrates a graph of a power of a transmission for different portions of the data packet of Fig. 2 at an increased power level for the PLCP data portion in accordance with the present invention;

Fig. 4d illustrates a graph of a range of a transmission with respect to the power graph of Fig. 4c in accordance with the present invention;

Fig. 5a illustrates a block diagram of a hard wired access point system in accordance with the present invention;

5 Fig. 5b illustrates a block diagram of a wireless access point system in accordance with the present invention;

Fig. 6 illustrates a detailed block schematic diagram of the RF section of the access point system of Fig. 5a in accordance with the present invention;

10 Fig. 7 illustrates a detailed block schematic diagram of an alternate embodiment of the RF section of the access point system of Fig. 5a in accordance with the present invention;

Fig. 8 is a flow diagram illustrating one particular methodology for configuring the power control module in accordance with the present invention; and

15 Fig. 9 is a flow diagram illustrating an alternate methodology for configuring the power control module in accordance with the present invention.

Detailed Description of the Invention

20 The present invention will now be described with reference to the drawings. The present invention will be described with reference to a system and method for dynamically adjusting transmission power of different portions of a data packet transmitting at different data rates. It should be understood that the description of these aspects of the invention are merely illustrative and that they should not be taken in a limiting sense.

25 Referring now to Fig. 1, a cellular communication system 50 illustrating an environment of the present invention is shown. The cellular communication system 50 includes a local area network (LAN) 52. The LAN or network backbone 52 may be a hardwired data communication path made of twisted pair cable, shielded coaxial cable or fiber optic cable, for example, or may be wireless or partially wireless in nature. Coupled to the LAN 52 are a stationary communication unit 53 and several access points 54. Only

one access point 54_a is shown hardwired to the network backbone 52, however, it is understood that more than one hardwired access points 54_a may be physically connected to the network backbone 52. The access points 54 may be hardwired to the network 52 such as access point 54_a or may be wirelessly coupled to the backbone 52 such as access point 54_b. Each access point serves as an entrance point through which wireless communications may occur with the network backbone 52. The wireless access point 54_b may be employed to expand the effective communication range of the cellular communication system 50. As is conventional, each wireless access point 54_b associates itself, typically by registration, with another access point or a host computer 60 coupled to the network backbone 52, whether hardwired or wireless, such that a link is formed between itself and other devices situated on the network backbone 52.

Each access point 54 is capable of wirelessly communicating with other devices in the communication system 50 *via* respective antennas commonly denoted by reference numeral 62. The antenna 62 for any particular device may be of any type suitable for use in a network cellular communication system, such as an omni-directional antenna, a yagi-type antenna, etc. A geographic cell (not shown) associated with each access point 54 defines a region of coverage in which successful wireless communication may occur. Depending on the type of antenna 62 selected and output power of the respective access point, the geographic cell may take one of several different forms and sizes. For example, the antenna 62 could be an omni-directional antenna if a generally spherical cell area of coverage is desired. A directed yagi-type antenna could be used as the antenna 62 for a more directed elliptical cell area of coverage.

The cellular communication system 50 also includes one or more mobile communication units 66. The mobile communication units 66 each include an antenna 67 for wirelessly communicating with other devices. Each mobile communication unit 66 communicates with devices on the network backbone 52 *via* a selected access point 54 and/or with other mobile communication units, and/or directly with the host computer 60 if within cell range of the host computer 60. Upon roaming from one cell to another, the mobile communication unit 66 is configured to associate itself with a new access point 54

or directly with the host computer 60 if within range. A mobile communication unit 66 registers with a particular access point which provides the particular mobile communications unit with wireless access to the network backbone 52.

Typically, access points 54 and mobile units 66 in different cells can communicate with each other during the same time period, such that simultaneous communication is occurring in system 50. However, access points 54 and mobile units 66 complying to the IEEE 802.11 protocol have cell ranges that are different with respect to different portions of a packet transmitted from an access point to a mobile unit or another access point. This is due to different portions of a packet being transmitted at different data rates and having different modulations. Fig. 2 illustrates portions of a packet 70 being transmitted at different data rates and thus having different transmission ranges. Fig. 2 is a block diagram depicting a Physical Layer Convergence Procedure (PLCP) frame or packet 70 conforming to the IEEE standard 802.11 "Direct Sequence Spread Spectrum Physical Layer Specification". Alternatively, the present invention may be employed utilizing the IEEE standard 802.11 "Frequency Hopping Spread Spectrum Physical Layer Specification" or any other protocol transmitting portions of packets at varying modulations and data rates. The packet 70, for example, includes a PLCP preamble portion 71, a PLCP header portion 72, and a Protocol Data Unit (PDU) portion 73 (data portion). The PLCP preamble 71 includes a RF SYNC field 74 and an Start Frame Delimiter (SFD) field 75. The sync field 74 is used by the radio to detect a signal to receive, and to reach steady state frequency offset correction and synchronization. The SFD field 75 is used to indicate the end of the PLCP preamble 71 and beginning of the PLCP header 72. The fields 74 and 75 of the PLCP preamble portion 71 are transmitted at a data rate of 1 Mbps. The PLCP header 72 includes a signal field 76, a service field 77, a length field 78 and Cyclical Redundancy Correction (CRC) field 79. The fields 76, 77, 78 and 79 of the PLCP header are transmitted at a data rate of 1 Mbps for a long IEEE 802.11 header and at 2 Mbps for a short IEEE 802.11 header. The PDU portion 73 of the packet 70 can be transmitted at 1, 2, 5.5 or 11 Mbps.

Fig. 3 illustrates a graph 80 corresponding to a transmission of the packet 70 with respect to range verses the data rate of the packet transmission at a constant power of 100 milliwatts. The PLCP header 71 transmitting at 1 Mbps at 100 milliwatts can, for example, have a range of about 2000 feet depending on antenna range, receiver sensitivity, antenna gain, cable loss etc. The PLCP 72 header 72 of the same packet transmitting at 2 Mbps at 100 milliwatts can have a range between 125 feet and 2000 feet. The data portion 73 of the same packet transmitting at 11 Mbps at 100 milliwatts can have a range of 125 feet. Any access point receiving a valid PLCP preamble may remain idle until the entire transmission is complete because the access point will assume that the device transmitting the PLCP preamble is transmitting within their cell. However, the access point may not receive the actual data because the range of the data is much less than the range of the preamble. If an access point transmits the data portion 73 at 11 Mbps, all other access points within 2000 feet of the access point will remain idle during the full transmission, while only access points within 125 feet of the transmitting access point will be able to receive data. In some indoor systems, all access points are within 2000 feet from one another and thus all but one access point will remain idle while the one access point is transmitting.

Figs. 4a-4d are graphs illustrating the transmitting power and range versus the time during transmission of a packet in accordance with the present invention. The graphs illustrate that by adjusting power during a packet transmission a more uniform range can be achieved. Fig. 4a includes a graph 82 illustrating adjustment of transmission of a packet where the data portion of the packet is transmitted at a power of 100 milliwatts and the transmission power of the preamble and header portion of the packet is lowered, so that the transmission range of the entire packet is uniform. As can be seen from graph 82, the power is increased during the transmission of the PLCP header. Although this causes the transmission of the PLCP header to increase outside the desired range during the power adjustment, access points outside the desired range will not receive a valid PLCP preamble, and therefore will ignore the portions of the header received as being interference or noise. This allows adjustment of power to be gradual as

opposed to instantaneous. Fig. 4b includes a graph 84 illustrating a uniform range of 125 feet corresponding to the power transmission graph of Fig. 4a.

Fig. 4c includes a graph 86 illustrating an adjustment of power of transmission of a packet where the preamble and header are transmitted at 100 milliwatts and the transmission power of the data portion is increased, so that transmission range of the entire packet is more uniform. Fig. 4d includes a graph 88 illustrating a uniform range of 2000 feet corresponding to the power transmission graph of Fig. 4c.

It is to be appreciated that a uniform range can be achieved by decreasing transmission power during transmitting of the PLCP preamble with respect to transmitting power of the data portion, or increasing transmission power during the transmitting of the data portion of the packet with respect to transmission power of the PLCP preamble. It is to be further appreciated that numerous variations of transmit power can be selected for the PLCP preamble, the PLCP header and the data portion for many given ranges and data rates. Although the graphs 84 and 88 illustrate power adjustment for two data rates, it is to be appreciated that the same principle could be applied to a packet transmitting at three data rates or more. As long as a full valid PLCP preamble is not received by an access point, the remaining portion of the packet will be disregarded as noise allowing the access point system to communicate to other devices during transmission of the packet.

Fig. 5a is a block diagram representative of each hardwired access point 54_a. Each hardwired access point 54_a is connected to the network backbone 52 *via* a connector 90 such as DB-9 or RJ-45 connector. The connector 90 is connected to the network backbone 52 at one end and to a network adapter transceiver 92 included in the access point 54_a at the other end. The network adapter transceiver 92 is configured according to conventional adapter transceiver techniques to allow the access point 54_a to communicate over the network backbone 52. The network adapter transceiver 92 is also connected to an internal bus 94 included within the access point 54_a. The access point 54_a further includes a processor 98 connected to the bus 94 for controlling and carrying out the operations of the access point 54_a. The processor 98 may include any of a variety of

different microprocessors, such as the Motorola 68360 or Intel 80486 microprocessors. It is understood that any suitable processor capable of carrying out the herein described functions of the access points 54_a may be used and falls within the scope of this invention.

5 The access point 54_a also includes a memory 100 connected to the bus 94. The memory 100 stores program code executed by the processor 98 for controlling the other elements within the access point 54_a to carry out the functions described herein. It will be readily apparent to a person having ordinary skill in the art of microprocessor programming how to program the processor 98 to carry out the operations described
10 herein using conventional programming techniques based on the flowcharts and descriptions provided herein. Accordingly, additional detail as to the specific program code has been omitted. The memory 100 also serves to buffer packets of information such as those received over the network backbone 52 or those transmitted to or received from the mobile communication units 66 or wireless access points 54_b. Furthermore, the
15 memory 100 may store tables relating to which of the mobile communication units 66 are registered to the network backbone 52 and/or the identification codes of the mobile communication units 66.

 Also connected to the bus 94 is a radio frequency (RF) section 110 included in the access point 54_a. The RF section 110 includes the aforementioned antenna 62 for
20 receiving radio signals from the transmitting radio signals to mobile communication units 66 and wireless access points 54_b (Fig. 5b) within the cell area of the access point 54_a. Information transmitted from a mobile communication unit 66 or wireless access point 54_b is received *via* the antenna 62 and is processed by an RF receiver 112 which is connected to the bus 94 and demodulates and decodes the signal and converts the signal
25 to a digital signal having a specific packet format. The processor 98 controls an RF transmitter 114 included in the RF section 110, the RF transmitter also being connected to the bus 94. The processor 98 causes the RF transmitter 114 to modulate and transmit an RF signal which in turn carries the information packet to the appropriate mobile communication unit 66 or wireless access point 54_b. A power control circuit 115 is

disposed between the antenna 62 and the RF transmitter 114. The power control circuit 115 controls the transmission power of different portions of a data packet transmitted by transmitter 114. The processor receives range information from the mobile communication unit via the receiver 112. The processor then calculates the necessary transmission power values needed for transmission of different portion of a packet. The power values are loaded to the power circuit 115, which dynamically adjusts the transmission power according to the downloaded power values during the transmission of a packet.

Fig. 5b is a block diagram representative of each wireless access point 54_b in the system 50. For the most part, the construction and operation of the components within the wireless access point 54_b are identical to those described with respect to the access points 54_a. Hence, similar components are denoted simply by the addition of a [b]. For example, the processor 98 in access point 54_a is similar to the processor 98_b in the wireless access point 54_b. However, the wireless access point 54_b is not connected directly to the network backbone 52 and therefore does not include a network transceiver 92 or connector 90 as in each access point 54_a. Rather, the wireless access point 54_b communicates with mobile communication units 66 registered thereto and with the particular access point with which the wireless access point 54_b is associated with *via* the RF section 110_b. Operations of the two access points 54_a and 54_b are primarily the same with the exception of the particular procedures described herein. As mentioned above, the wireless access points 54_b function to extend the relative cell coverage of a given access point 54_a, and serve primarily to relay information between the access points 54_a and connected to the network backbone 52 and mobile communication units 66. The access point 54_b also includes a power control circuit for dynamically adjusting the transmission power of packet based on the desired range of the transmission.

Fig. 6 is a more detailed illustration of one particular embodiment of the processor 98 and RF section 110 arrangement where like components are denoted by like reference numerals. The power control circuit includes a power data register section 120, a D/A converter section 124 and a transmit power amplifier section 126. The transmit power

amplifier section 126 transmits the packet data information to a transmit/receive switch 128 coupled to the antenna 62. The transmit/receive switch 128 switches from receiving data through antenna 62 and transmitting data through antenna 62. The power control circuit 115 can be packaged in a single integrated circuit, such as an ASIC. Furthermore, the processor 98, the power control circuit 115, the transmitter 114 and the receiver 112 could be packaged as an ASIC. The transmit power amplifier section 126 receives packet data information from the transmitter 114.

The operation will be described with respect to the operation of the processor 98 and the power control circuit 115 when receiving a registration request from the mobile communication unit 66. The mobile communication unit 66 will transmit a registration request which is received by the antenna 62 and transmitted through the transmit/receive switch 126 to the receiver 112. The receiver 112 receives the data transmission and converts the data to digital data understandable by the processor 98. The data can include information relating transmission power and/or transmission range of the mobile communication unit 66 or the receiver 112 could include the necessary circuitry for calculating the transmission power of the data received. The processor 98 receives this information and determines the necessary power adjustments for transmitting a data packet with portions having variable data rates. The processor 98 then transmits the power adjustment information to the power data register section 120. The power data register section 120 can include a preamble register, a header register and a data register for storing different power information for each portion of a packet. It is to be appreciated that any number of registers can be used if the data protocol is different than the IEEE 802.11 protocol, but still transmits packets or portions of packets at different data rates.

The power data register 120 will transfer data words corresponding to the different transmit power levels one at a time. The D/A converter 124 converts the digital information to an analog control signal coupled to the transmit power amplifier 126 for dynamic adjustment of the transmission power. The processor 98 also creates the data packet according to the appropriate data protocol based on information stored in the

memory 100 and/or based on information received over the network 52. The processor 98 transmits the data protocol to the transmitter 114 in digital form. The transmitter converts the data digital data to an analog modulated signal for transmission over the antenna 62. The modulated signal is then transmitted to the power amplifier 126 for
5 adjustment of the transmission power level before transmission over the RF link.

Fig. 7 illustrates an alternate embodiment of the processor 98 and RF section 110 arrangement where like components are denoted by like reference numerals. In the embodiment illustrated in Fig. 7, the power control circuit 115 includes the D/A converter section 124 and the power transmitter power amplifier section 126, but not the power data
10 register section 120. The function of the power data register is performed by software of the processor 98. Utilizing software allows for calculation of the timing necessary to download power data words where number of packet portions and the data rates for these packet portion may vary from transmission to transmission. The power control data is directly downloaded from the processor 98 to the D/A converter section 124. It is to be
15 appreciated that in some circumstances the power control data can be a constant value, such that the access point system is tuned for a particular range defining a cell area. In this configuration, the D/A converter section 124 can be replaced with an analog circuit configuration independent of the processor 98. It is to be further appreciated that the above described power range control can be implemented into the transmission circuitry
20 of the mobile communication unit 66 such that the mobile communications 66 unit has an adjustable or predefined transmission range. Furthermore, both the access points 54 and the mobile communications units 66 throughout the system can have predefined power adjustment settings for defining predefined system ranges with varying data rates in a packet transmission, such as the IEEE 802.11 standard.

25 In some situations it is desirable to adjust the transmission range of an access point system 54 and a mobile communication unit 66 during a communication session to reduce the amount of interference received by either or both the access point system 54 and the mobile communication unit 66. In other situations it is desirable to reduce the transmission power, and ultimately the transmission range of an access point system 54

and a mobile communication unit 66 during a communications session to conserve the battery power of one or both the access point system 54 and mobile communication unit 66. The present invention allows for both dynamic adjustment of the power transmission range for either or both the access point system 54 and the mobile communication unit 66 in addition to dynamic adjustment of the power transmission range for a given data packet.

Fig. 8 is a flow diagram illustrating one particular methodology for performing a dynamic power transmission adjustment when the power transmission range is evaluated based on the transmission range of a registration request to one of the access points 54 from one of the mobile communications units 66 according to the present invention. In step 150, the access point system 54 receives a registration request from a mobile communication unit 66. In step 160, the access point system evaluates the transmission power of the request. In step 170, the processor 98 calculates the desired transmission response range based on the number of packet portions and varying data rates for these portions. In step 180, the processor 98 configures the data power words depending on the number of packet portions with different data rates. The processor 98 then configures the data packet for transmission based on the appropriate protocol or relays information received from the network 52 in step 190. In step 200, the processor downloads power data to the D/A converter 124 based on the desired response range and the data rate of the beginning of the data packet. The access point 54 then begins transmission of the packet in step 210. In step 220, the processor downloads N number of power data words during transmission of the packet based on N number of data rates.

Fig. 9 is a flow diagram illustrating one particular methodology for performing a dynamic power transmission adjustment when the desired data rates and ranges are transmitted over the network to each access points 54 from the host computer 60 according to the present invention. In step 250, the host computer 60 transmits desired range information to each access point system 54. In step 260, the access point system evaluates the range request. In step 270, the processor 98 calculates the desired transmission response range based on the number of packet portions and varying data

rates for these portions. In step 280, the processor 98 configures the data power words depending on the number of packet portions with different data rates. The processor 98 then configures the data packet for transmission based on the appropriate protocol or relays information received from the network 52 in step 290. In step 300, the processor
5 98 downloads power data to the D/A converter 124 based on the desired response range and the data rate of the beginning of the data packet. The access point 54 then begins transmission of the packet in step 310. In step 320, the processor 98 downloads N number of power data words during transmission of the packet based on N number of data rates.

10 What has been described above are preferred embodiments of the present invention. It is, of course, not possible to describe every conceivable combination of components or methodologies for purposes of describing the present invention, but one of ordinary skill in the art will recognize that many further combinations and permutations of the present invention are possible. Accordingly, the present invention is intended to
15 embrace all such alterations, modifications and variations that fall within the spirit and scope of the appended claims.

What is claimed is:

- 1 1. A communication unit in a cellular communication system, the unit
2 comprising:
3 a transmitter adapted to transmit data over an RF link; and
4 a power control module coupled to the transmitter, the power control module
5 adapted to receive a data packet having a first portion and a second portion and transmit
6 the first portion at a first transmission power and the second portion at a second
7 transmission power.
2. The unit of claim 1, wherein the communication unit transmits the first
 portion of the data packet at a first data rate and the second portion of the data packet at a
 second data rate.
3. The unit of claim 2, wherein the first transmission power and the second
 transmission power are selected so that the first portions and the second portion have
 similar transmission ranges.
4. The unit of claim 1, wherein the data packet includes a third portion and
 the power adjustment module is adapted to receive the data packet having the third
 portion and transmit the third portion at a third transmission power.
5. The unit of claim 4, wherein the communication unit transmits the first
 portion of the data packet at a first data rate, the second portion of the data packet at a
 second data rate and the third portion of the data packet at a third data rate.
6. The unit of claim 5, wherein the data packet conforms to the IEEE 802.11
 standard protocol and the first portion of the data packet is a PLCP preamble, the second

portion of the data packet is a PLCP header and the third portion of the data packet is a data portion.

7. The unit of claim 1, wherein the communication unit is an access point system.

8. The unit of claim 1, wherein the communication unit is a mobile communication unit.

9. The unit of claim 1, wherein the power control module includes a transmission power amplifier adapted to receive the power data packet and dynamically control the transmission power of the first portion and the second portions.

10. The unit of claim 9, wherein the power control module includes a D/A converter adapted to receive power data information in digital format and convert the power data information to an analog control signal, the analog signal adapted to control the transmission power of the transmission power amplifier.

11. The unit of claim 10, further including a processor coupled to the D/A converter, the processor adapted to transmit the power data information to the D/A converter.

12. The unit of claim 11, further including a receiver coupled to the processor, the receiver being adapted to receive a transmission from other communication units.

13. The unit of claim 12, wherein the receiver is further adapted to provide transmission power information to the processor from a transmission communication unit transmitting information to the receiver, the processor evaluating a range from the

transmission power information and downloading power data information to the power control circuit based on a desired transmission range of the data packet.

14. The unit of claim 10, wherein the power control module includes a power data register section coupled to the D/A converter, the power data register module being adapted to store the power data information and provide the power data information to the D/A converter.

15. The unit of claim 14, further including a processor coupled to the power data register section, the processor adapted to transmit the power data information to the power data register section.

16. The unit of claim 15, further including a receiver coupled to the processor, the receiver being adapted to receive a transmission from other communication units.

17. The unit of claim 16, wherein the receiver is further adapted to provide transmission power information to the processor from a transmission communication unit transmitting information to the receiver, the processor evaluating a range from the transmission power information and downloading power data information to the power control circuit based on a desired transmission range of the data packet.

18. The unit of claim 1, wherein the communication unit is coupled to a network and the network provides the power control circuit with information relating to the power transmission level of the first portion and the second portion.

19. A method of transmitting a data packet in a cellular communication system, comprising the steps of:
transmitting a first portion of the data packet at a first transmission power level;
and

5 transmitting a second portion of the data packet at a second transmission power
6 level.

20. The method of claim 19, further including the step of transmitting a third portions of the data packet at a third transmission power level.

21. The method of claim 19, wherein the first portion of the data packet is transmitted at a first data rate and the second portion of the data packet is transmitted at a second data rate.

22. The method of claim 19, wherein the first power level and the second power level are adjusted so that the first portion and the second portion have essentially the same transmission range.

23. The method of claim 19, wherein a step of providing a communication unit precedes the step of transmitting a first portion of the data packet at a first transmission power level, the communication unit including a transmitter, a power control module coupled to the transmitter, a processor coupled to the power control module and a receiver coupled to the processor.

24. The method of claim 23, wherein the processor provides the power control module with the first transmission power and the second transmission power after the step of providing a communication unit and prior to the step of transmitting a first portion of the data packet at a first transmission power level.

25. The method of claim 24, wherein the processor evaluates the first transmission power and the second transmission power based on a desired transmission range for the first portion and the second portion of the data packet.

26. The method of claim 25, wherein the processor evaluates the first transmission power and the second transmission power based on a desired transmission range for the first portion and the second portion of the data packet based on a transmission power level of a transmission received from another mobile communication unit.

27. The method of claim 25, wherein the communication unit is coupled to a network and the processor evaluates the first transmission power and the second transmission power based on a desired transmission range for the first portion and the second portion of the data packet, the network providing the processor information relating to the desired transmission range.

28. The method of claim 19, wherein the power level of the first portion and the second portion is dynamically adjusted during the transmission of the data packet.

29. An access point system in a cellular communication system utilizing an IEEE 802.11 standard protocol, comprising:

- a transmitter adapted to transmit data over an RF link;
- a power control module coupled to the transmitter, the power control module adapted to receive a data packet having a PLCP preamble and PLCP header portion and a data portion and dynamically adjust the transmission power of the packet during transmission of the packet, such that the PLCP preamble portion begins transmitting at a first transmission power level and the data portion begins transmitting at a second transmission power level;
- a processor coupled to the power adjustment module, the processor being adapted to provide power adjustment information to the power control module; and
- a receiver coupled to the processor, the receiver adapted to receive data over an RF link wherein the access point system is coupled to a network.

30. The system of claim 29, wherein the power control module includes a transmission power amplifier adapted to receive the data packet and control the transmission power of the PLCP preamble portion and the data portion, the transmission power amplifier coupled to a D/A converter, the D/A converter being adapted to receive power data information in digital format and convert the power data information to an analog control signal, the analog control signal adapted to control the transmission power of the transmission power amplifier.

31. The system of claim 30, wherein the power control module include a power data register module coupled to the D/A converter, the power data register module being adapted to store the power data information and provide the power data information to the D/A converter wherein the processor is coupled to the D/A converter, the processor adapted to transmit the power data information to the D/A converter.

32. A cellular communication system, comprising:
means for transmitting a data packet having a first portion and a second portion;
and
means for dynamically adjusting the transmission power level of the first portion with respect to the second portion of the data packet coupled to the means for transmitting a data packet having a first portion and a second portion.

33. The system of claim 32, further including means for determining the transmission power levels of the first and the second portion based on a desired transmission range for both the first and the second portion.

34. The system of claim 32, wherein the means for dynamically adjusting the transmission power level of the first portion with respect to the second portion of the data packet further provides for adjusting the power transmission level of a third portion of the data packet with respect to the first and second portions.

- 1 35. A signal transmitted over a wireless communication system, the signal
- 2 comprising:
- 3 a data packet having a first portion transmitted at a first power level and a second
- 4 portion transmitted at a second power level.

5

Abstract of the Invention

A system and method is provided for adjusting transmission power of different portions of a data packet. The system and method is especially useful when utilizing the IEEE 802.11 standard protocol due to the varying transmission data rates of a packet. A IEEE 802.11 packet includes a preamble portion, a header portion and a data portion.

10 The preamble portion has a data rate of 1 Mbps, the header has a data rate of 1 or 2 Mbps and the data portion has a data rate of 1, 2, 5.5 or 11 Mbps. At a given fixed power level, a transmission at a higher data rate has a lower transmission range than a transmission at a lower data rate. Therefore, the present invention provides for a system and method that adjusts the power level of different portions of a data packet, so that the entire data packet
15 has a more uniform range. This eliminates the need for components in the system receiving a preamble portion of a transmission at higher ranges to remain idle during transmission of an entire frame. The system and method can be applied to both access points and mobile units in a cellular communications system.

S:\HARRIS\patents\telxon\telnp200us\telnp200uspat.wpd

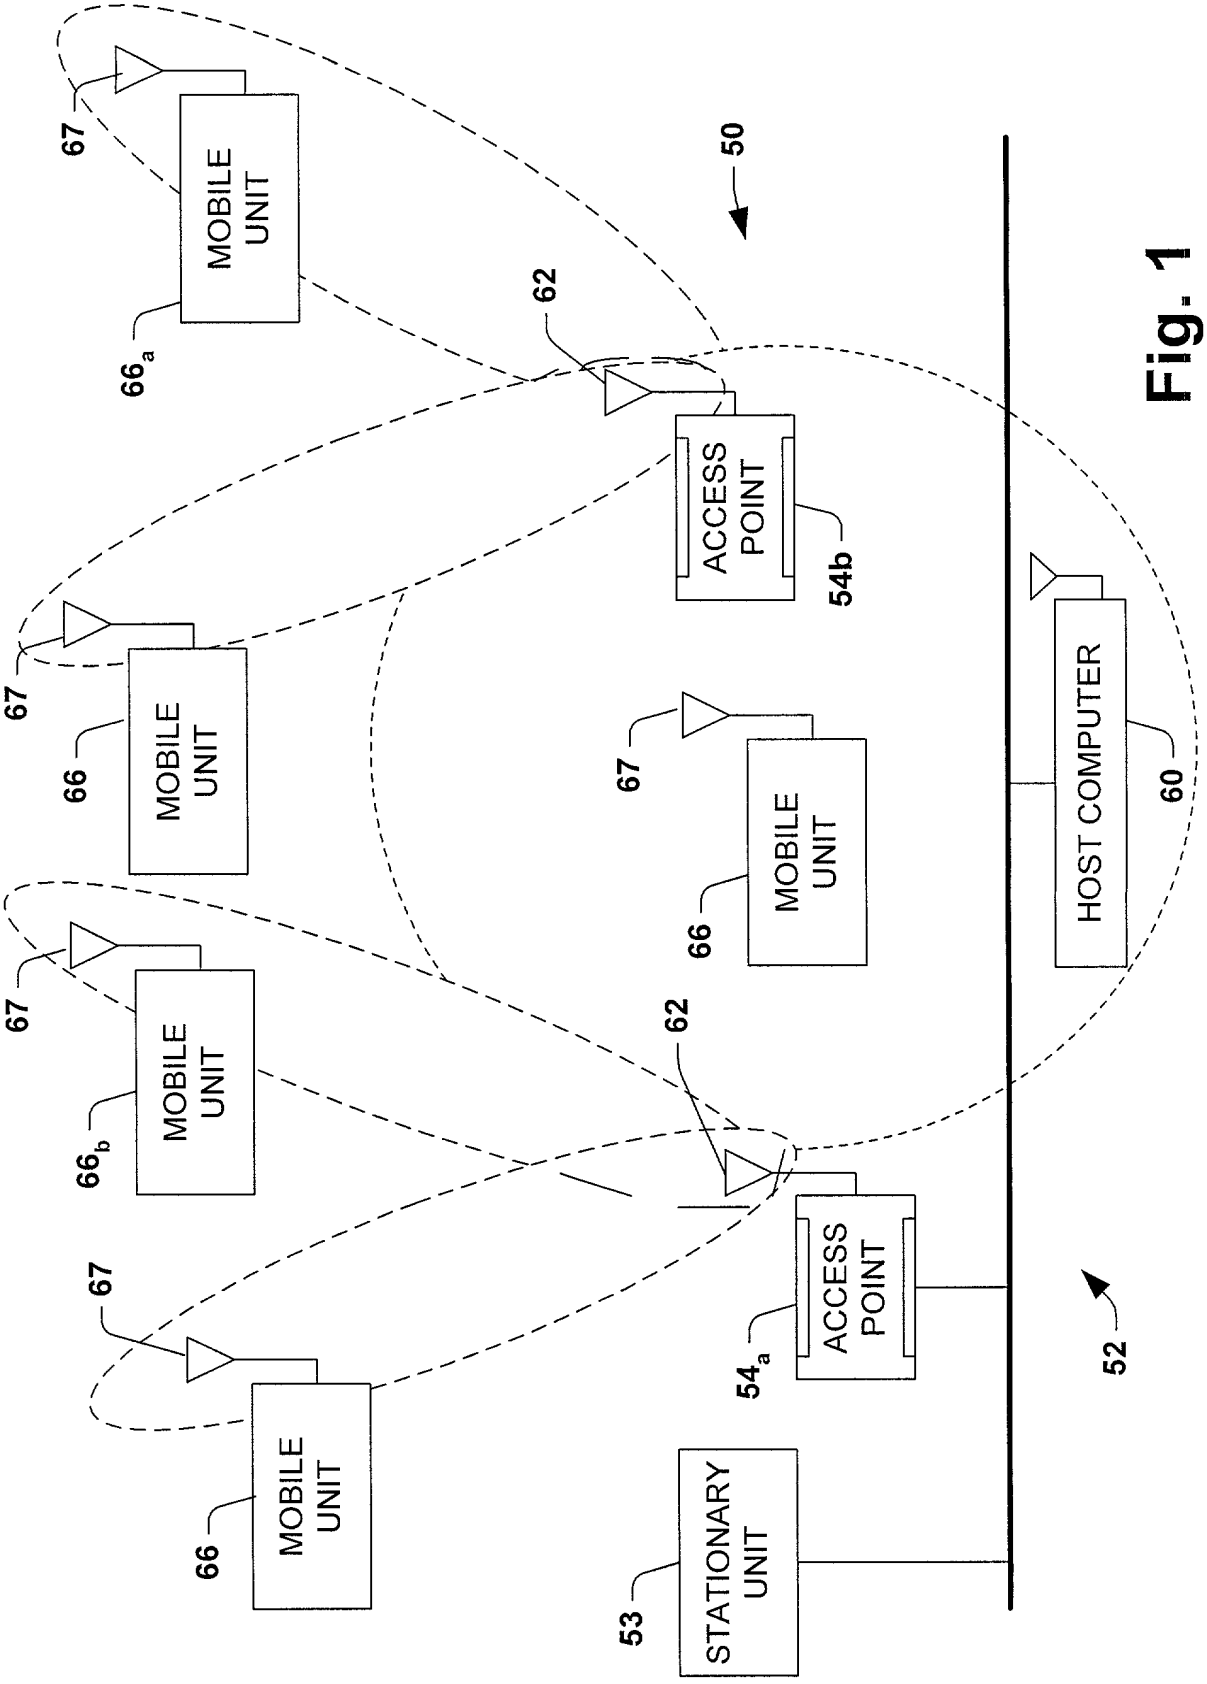


Fig. 1



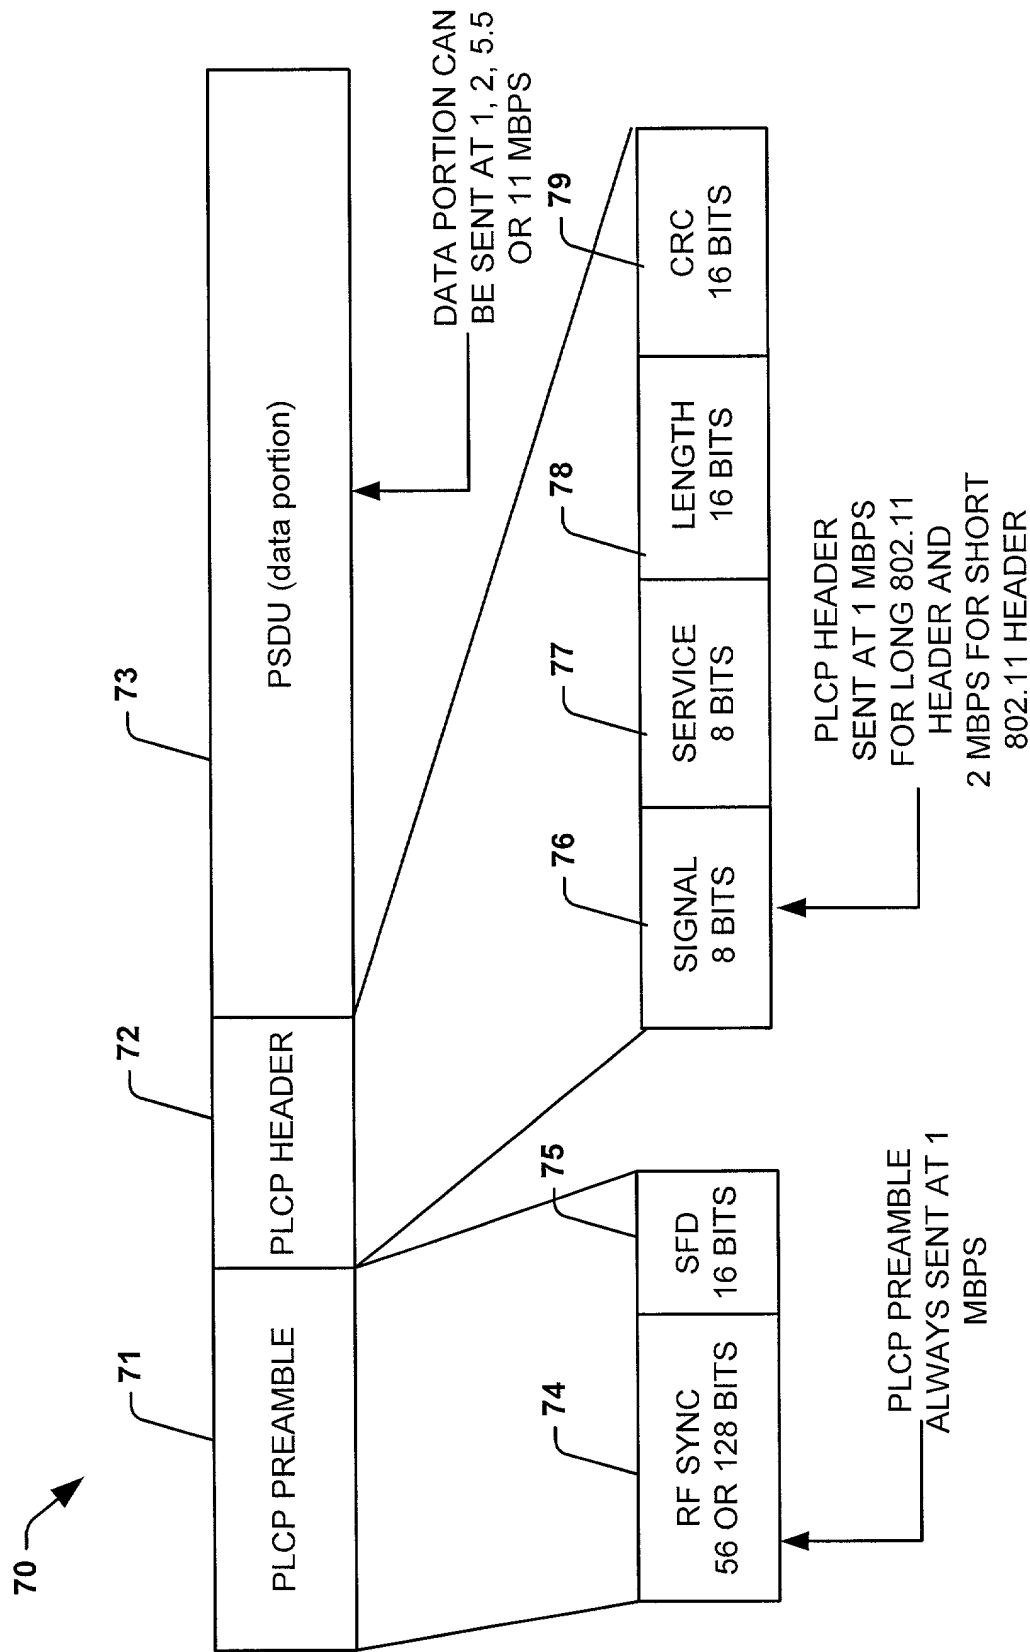



Fig. 2

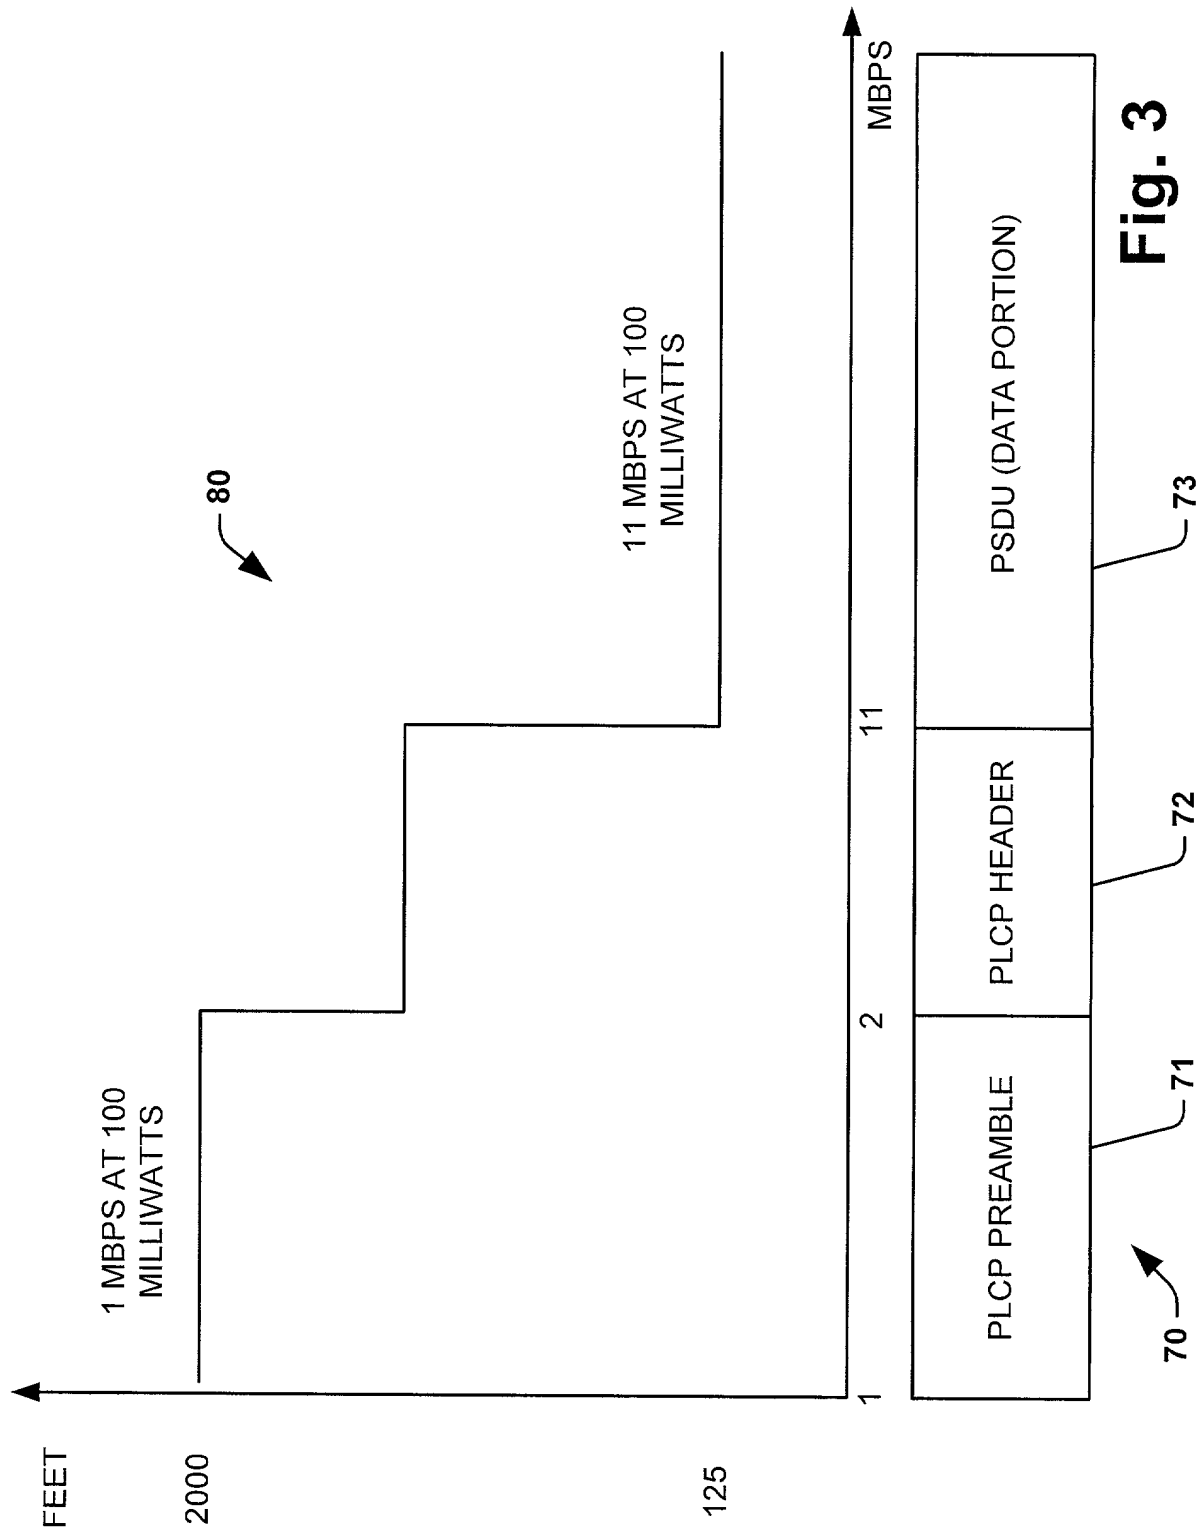

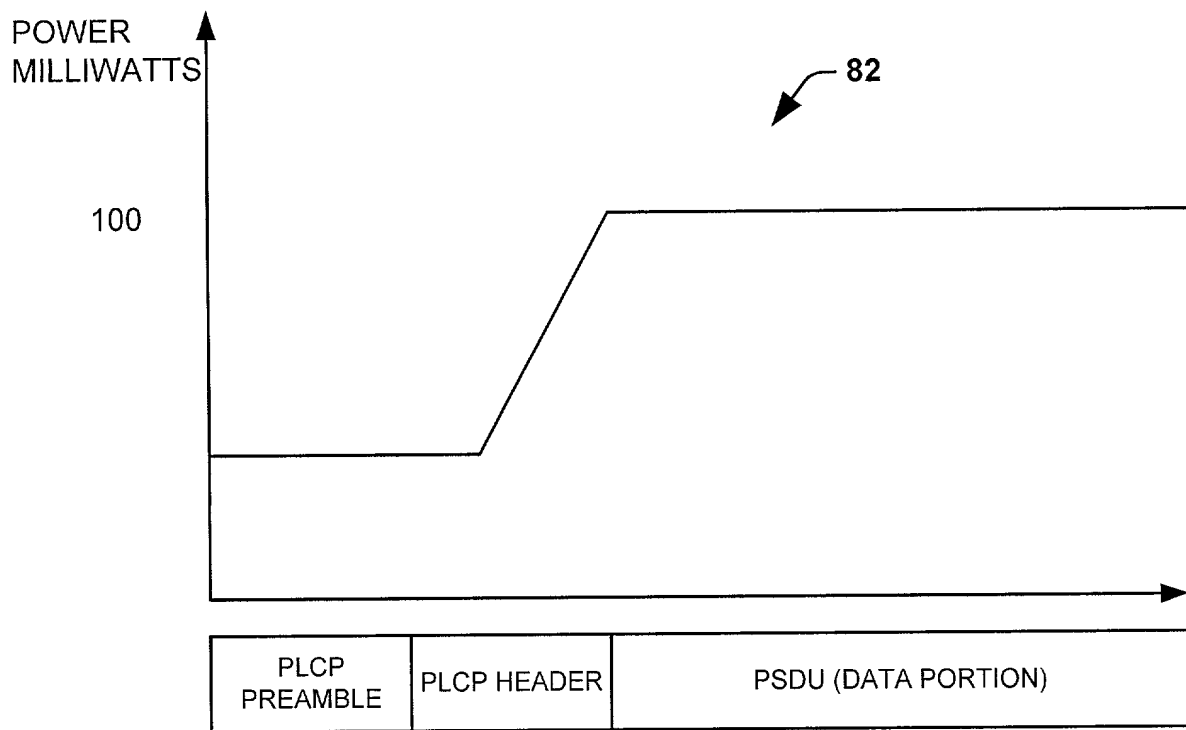

70

Fig. 4a

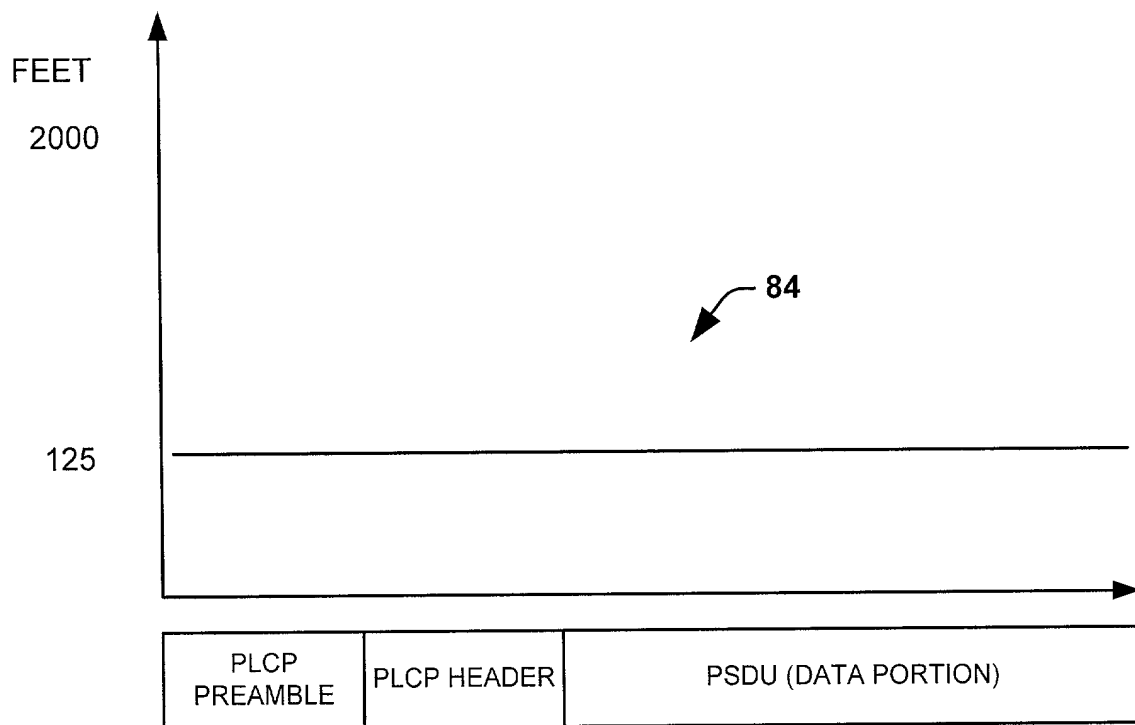

70

Fig. 4b

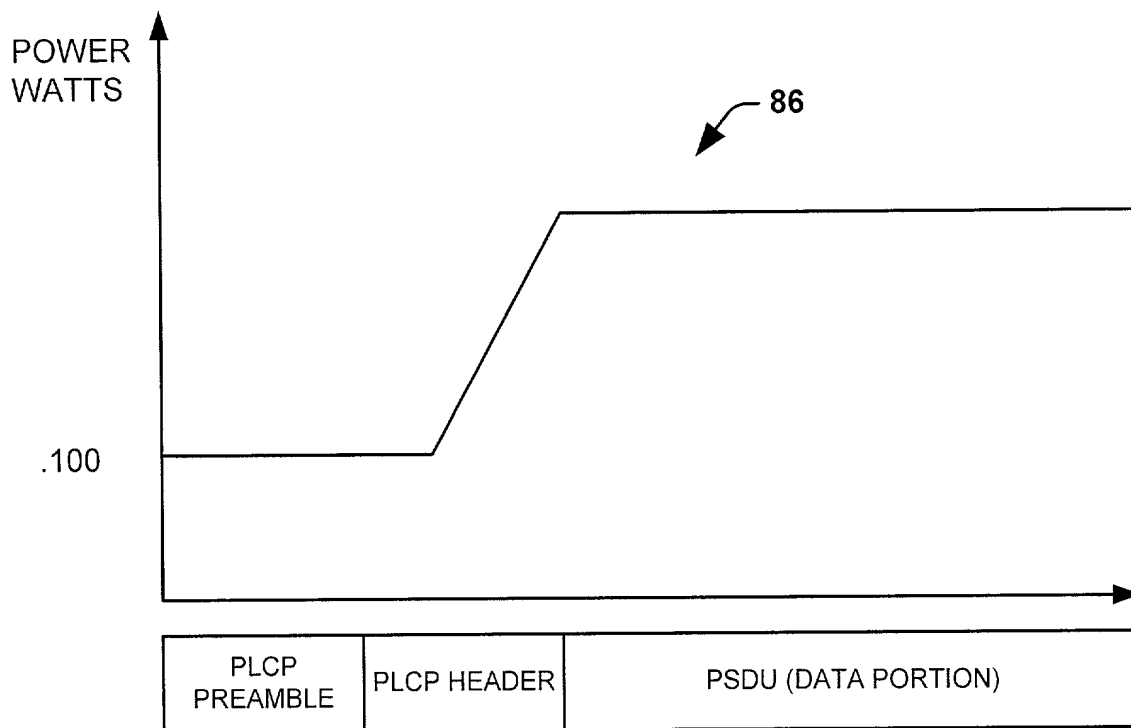


Fig. 4c

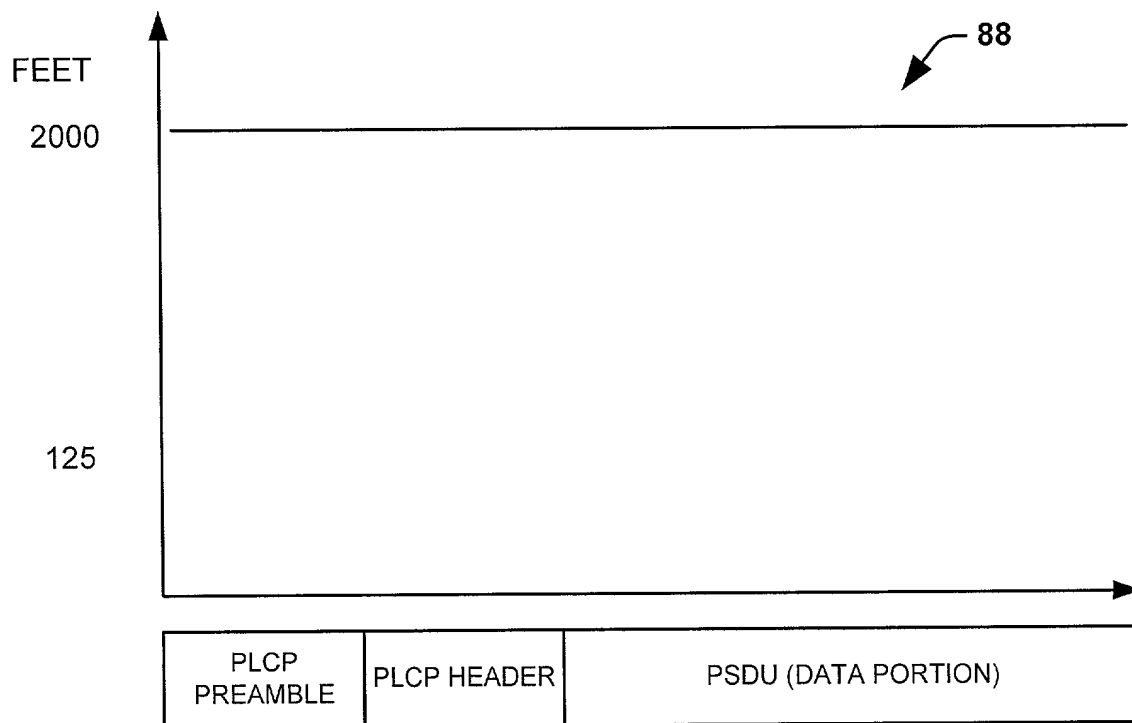


Fig. 4d

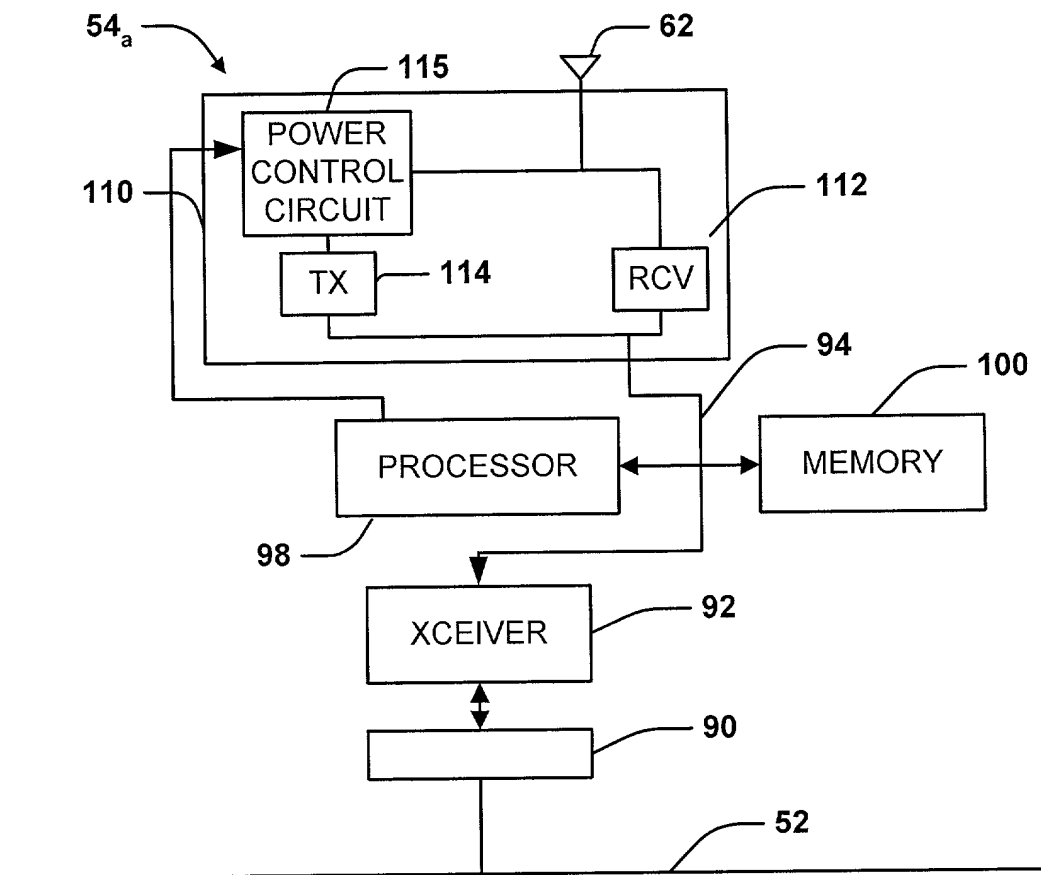


Fig. 5a

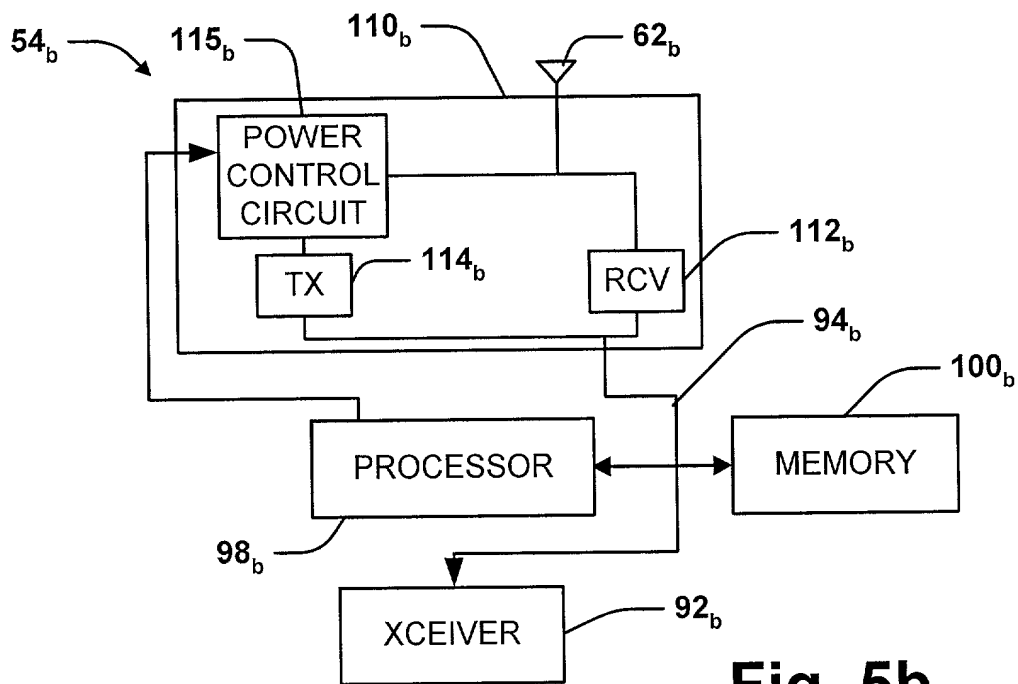


Fig. 5b

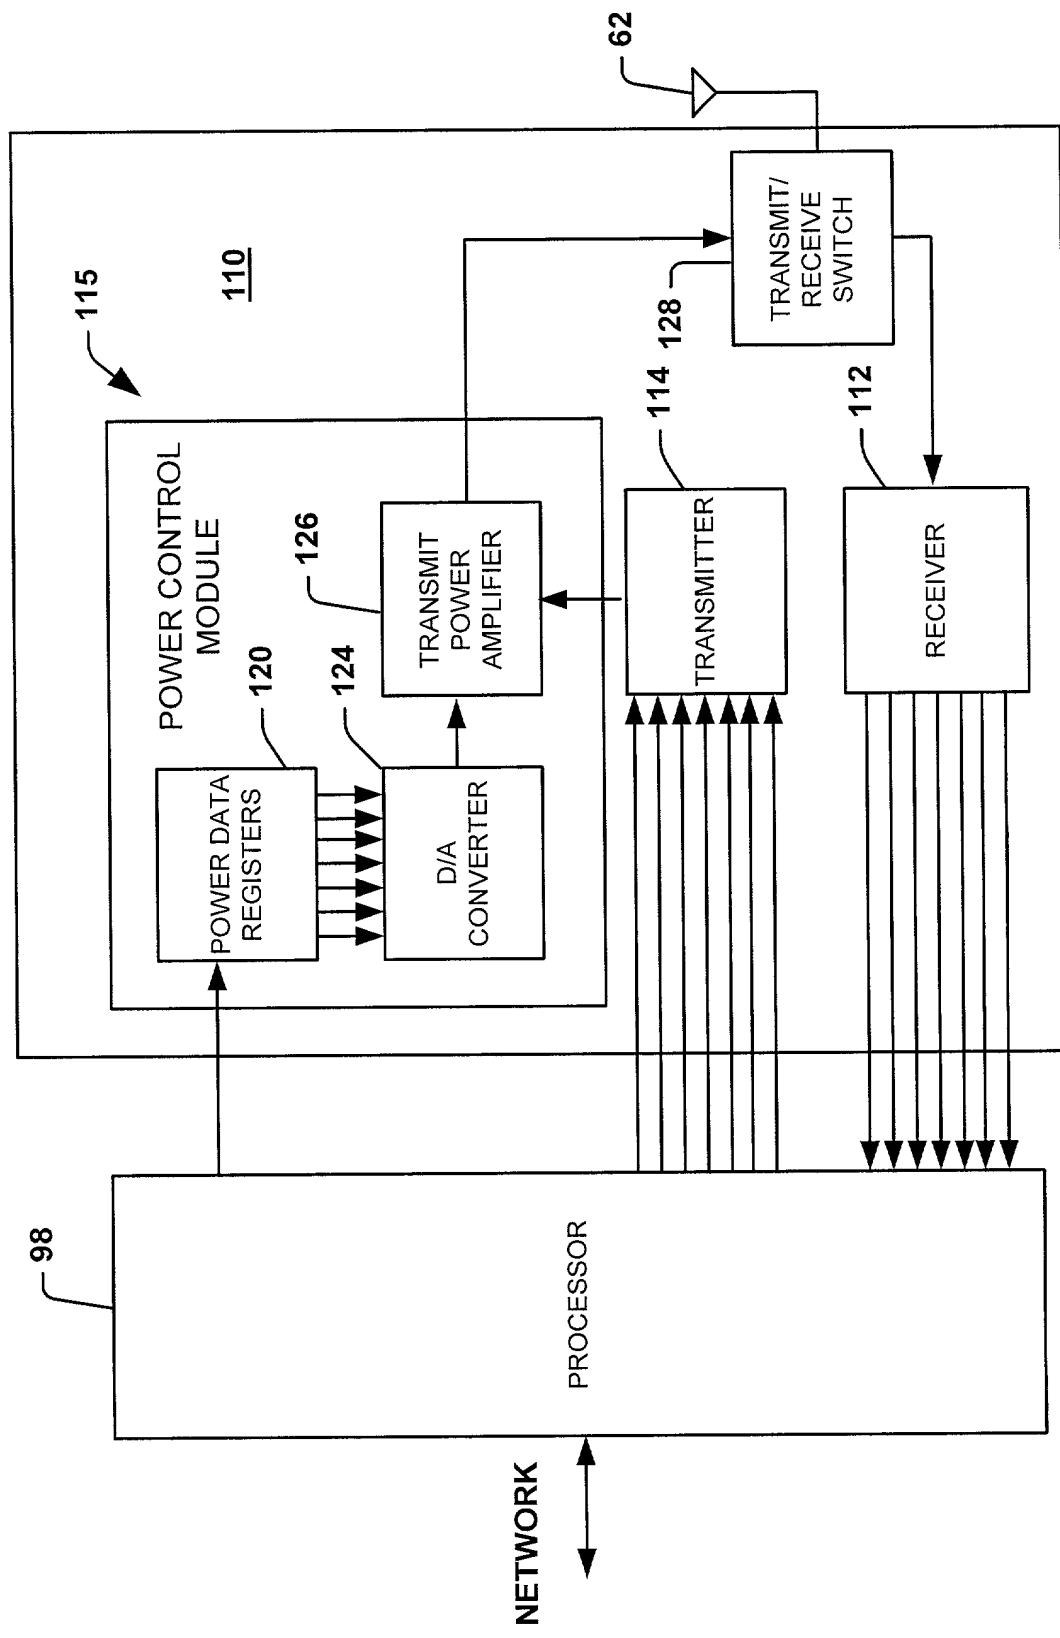


Fig. 6

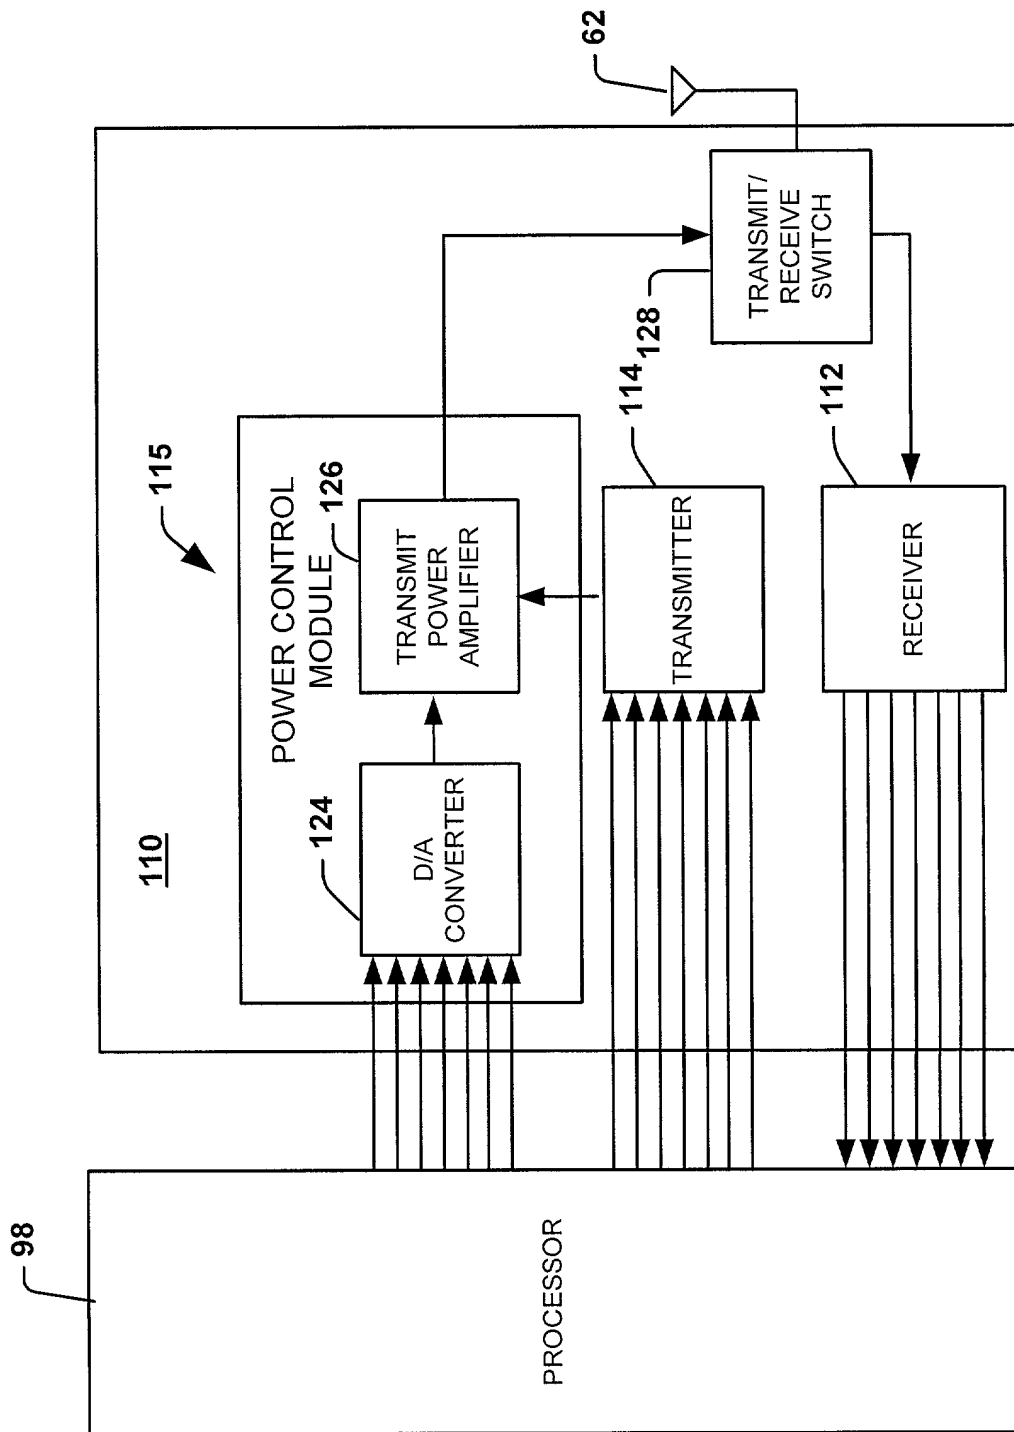


Fig. 7

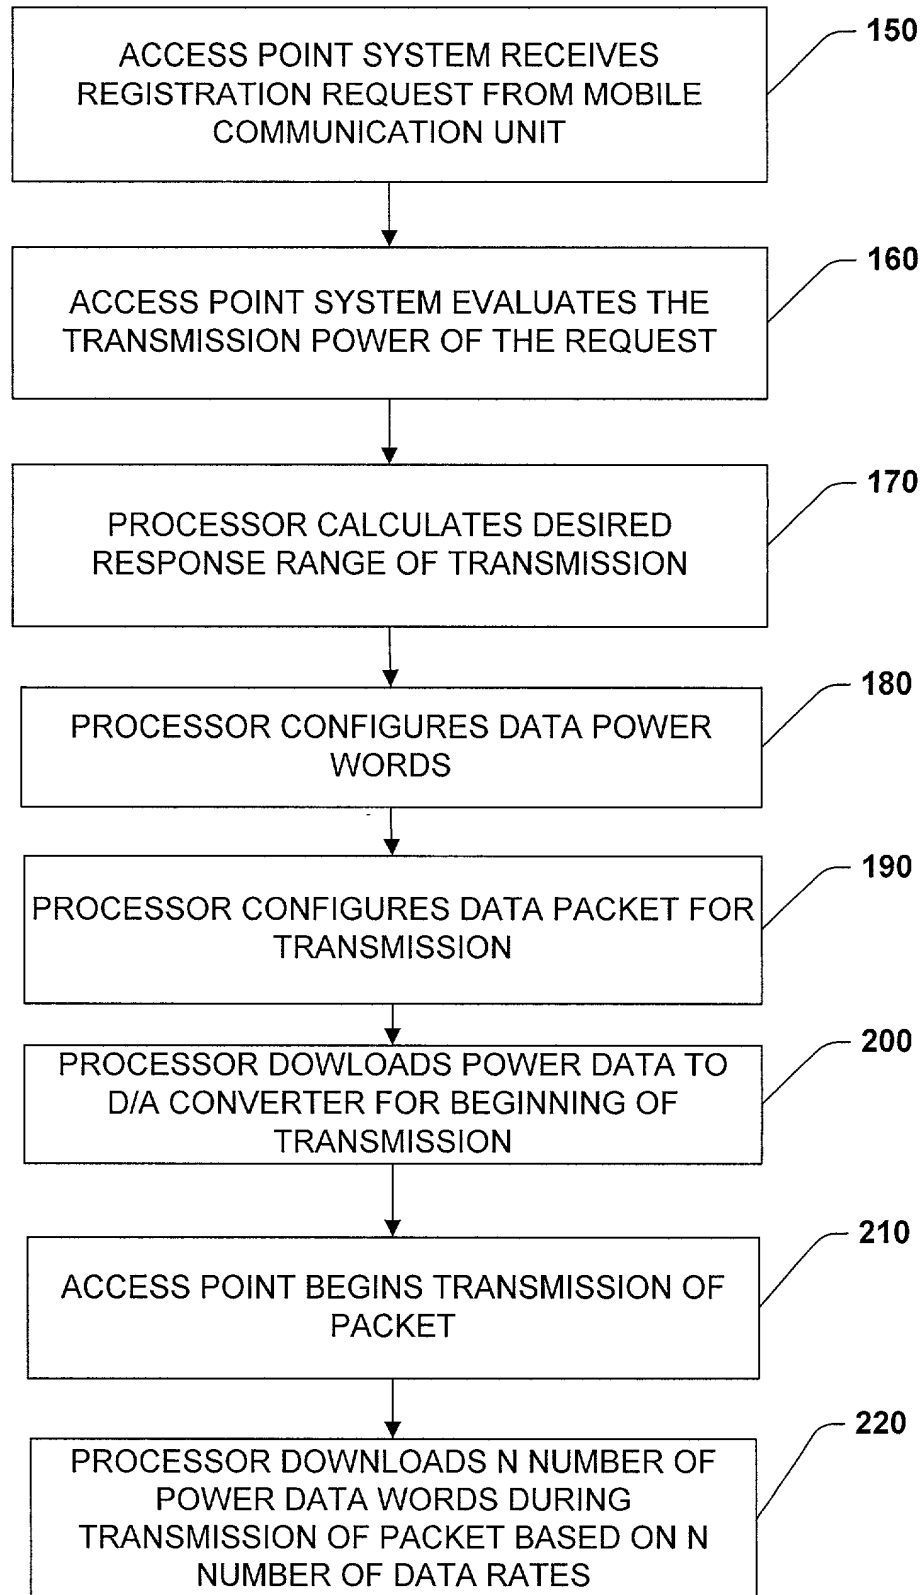


Fig. 8

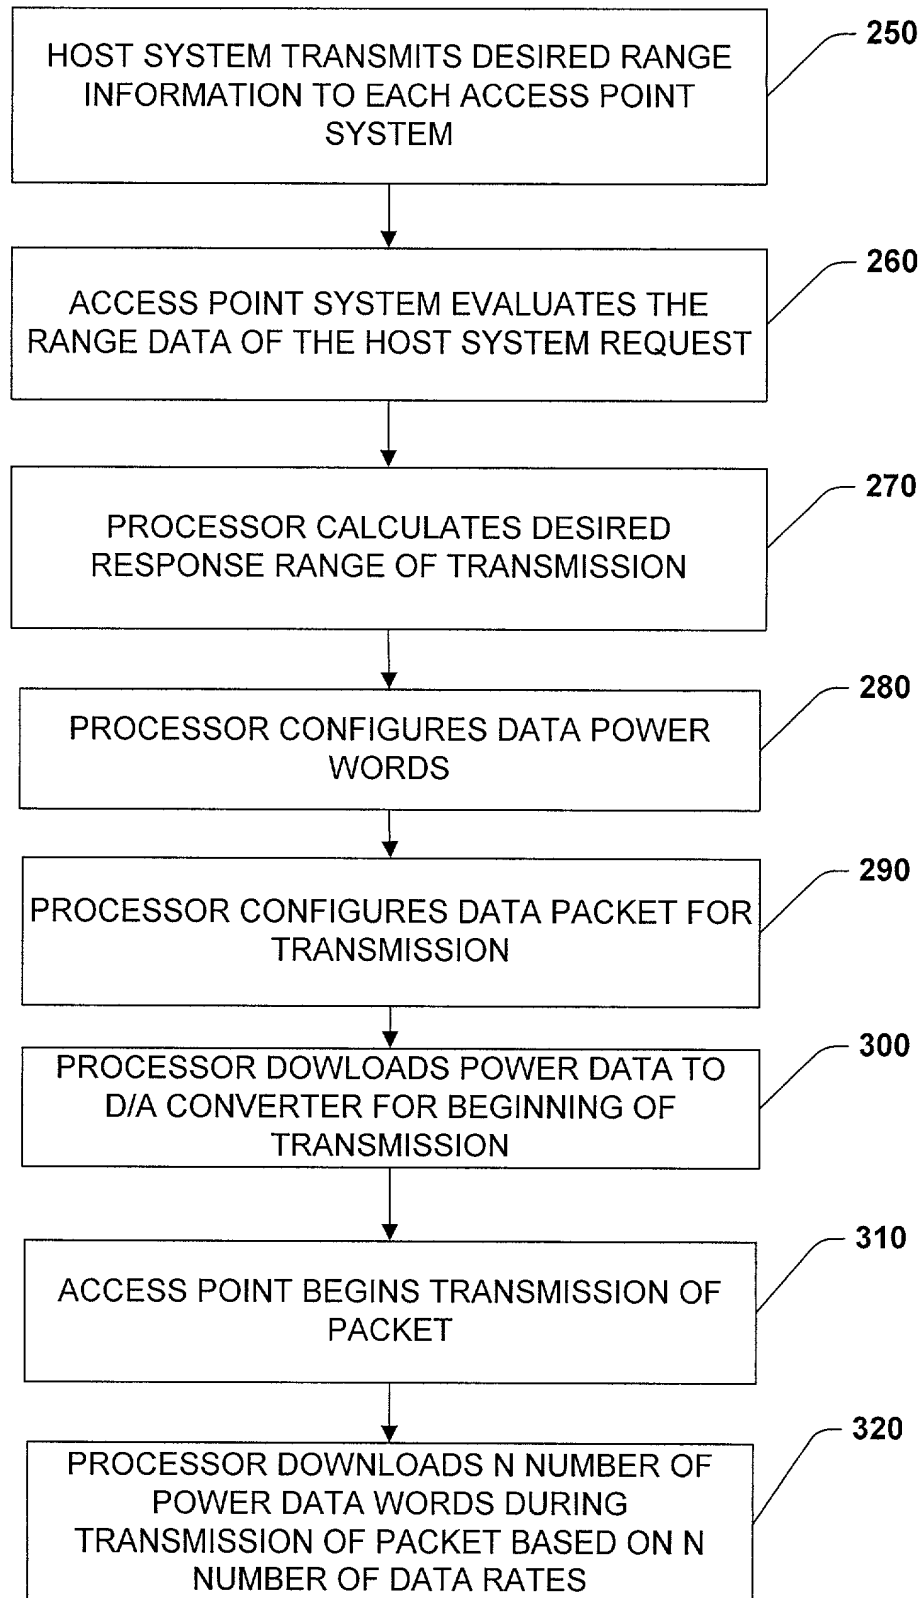


Fig. 9

COMBINED DECLARATION AND POWER OF ATTORNEY
(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: **IMPROVED 802.11 NETWORKS USING DYNAMIC POWER CONTROL FOR RF TRANSMISSION**

the specification of which

- (a) ☒ is attached hereto.
- (b) ☐ was filed on _____ as Serial No. _____ or ☐ Express
Mail No. _____, as Serial No. not yet known, and was amended on _____
(if applicable).
- (c) ☐ was described and claimed in PCT International Application No. _____
filed on _____ and amended under PCT Article 19 on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability in accordance with Title 37, Code of Federal Regulations §1.56(a).

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

- (d) ☒ no such applications have been filed.
- (e) ☐ such applications have been filed as follows.

**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35, USC 119
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Himanshu S. Amin, Reg. No. 40,894; Thomas G. Eschweiler, Reg. No. 36,981; and
Christopher P. Harris, Reg. No. 43,660.

The undersigned to this declaration and power of attorney hereby authorizes the U.S. attorney(s) named herein to accept and follow instructions from

Name(s) of authorized representative(s) _____
Address _____

as to any actions to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney(s) and the undersigned. In the event of a change in the person(s) from whom instructions may be taken, the U.S. attorney(s) will be so notified by the undersigned.

Send Correspondence To:

Himanshu S. Amin, Esq.
AMIN & ESCHWEILER, L.L.P.
24TH Floor, National City Center
1900 East 9TH Street
Cleveland, Ohio 44114

Direct Telephone Calls To:
(name and telephone number)

Himanshu S. Amin, Esq.
(216) 696-8730

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued therein.

Full name of **sole or first inventor**: Michael L. Trompower

Inventor's signature: Michael L. Trompower

Date: 06 Jan 2020 Country of Citizenship: U.S.

Residence: Navarre, Ohio

Post Office Address: 6280 Shepler Church Road SW
Navarre, Ohio 44662

Full name of **second joint inventor**, if any: _____

Inventor's signature: _____

Date: _____ Country of Citizenship: _____

Residence: _____

Post Office Address: _____

CHECK FOR ANY OF THE FOLLOWING ADDED PAGE(S) WHICH
FORM A PART OF THIS DECLARATION

☒ This declaration ends with this page.